A3G5N1700MT3

1700V N-Channel MOSFET Gen3

Description

Silicon Carbide (SiC) MOSFET use a completely new technology that provide superior switching performance and higher reliability compared to Silicon. In addition, the low ON resistance and compact chip size ensure low capacitance and gate charge. Consequently, system benefits include highest efficiency, faster operating frequency, increased power density, reduced EMI, and reduced system size.

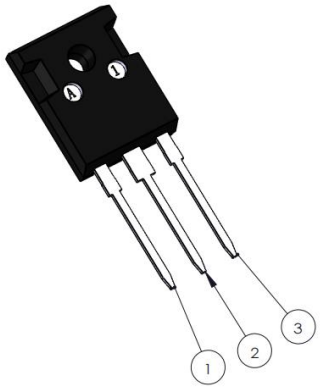

Features

- High Speed Switching with Low Capacitances
- Technology with 12V Gate Drive
- Lower Q_G and Device Capacitances(Coss,Crss)
- Body Diode with Low V_F and Low Q_{RR}
- Faster and More Efficient Switching
- ROHS Compliant, Halogen free

Application

- Solar String Inveter and Central Inverter
- UPS
- Switch Mode Power Supplies
- Power Factor Correction Modules
- Battery Charging
- Auxiliary Power Supply
- High Voltage Coverter



Ordering Information

Part Number	Marking	Package	Packaging
A3G5N1700MT3	A3G5N1700MT3	TO-247-3	Tube

Absolute Maximum Ratings(Tc=25℃)

Symbol	Parameter	Value	Unit
V_{DS}	Drain-Source Voltage	1700	V
I_D	Drain Current(continuous)at Tc=25℃	5	A
I_D	Drain Current(continuous)at Tc=100℃	3	A
I_{DM}	Drain Current (pulsed)	10	A
V_{GS}	Gate-Source Voltage	-5/+15	V
P_D	Power Dissipation T_C = 25°C	60	W
$T_{J,}$ Tstg	Junction and Storage Temperature Range	-55 to +175	℃

Electrical Characteristics(T_J = 25℃ unless otherwise specified)

Typical Performance-Static

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
BV_{DS}	Drain-source Breakdown Voltage	I_D=100uA,V_{GS}=0V	1700			V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS} =1700V, V_{GS} =0V, T_J=25°C			100	uA
I_{GSS}	Gate-body Leakage Current	V_{DS} =0V ; V_{GS} =-5 to 15V			100	nA
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}= $V_{GS,}$ I_D=1mA	1.5	2	3	V
V_{GSon}	Recommended turn-on Voltage	Static		12		V
V_{GSoff}	Recommended turn-off Voltage			-3		V
$R_{DS(on)}$	Static Drain-source On Resistance	V_{GS}=12V, I_D=2A		750	1000	mΩ
		V_{GS}=12V, I_D=2A T_J=175℃		1350		mΩ

Typical Performance-Dynamic

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
C_{iss}	Input Capacitance	V_{DS}=1000V,f=1MHz,V_{GS}=0V V_{AC}=25mV		200		pF
C_{oss}	Output Capacitance			6		pF
C_{rss}	Reverse Transfer Capacitance			1		pF
g_{fs}	Transconductance	V_{DS}=10V , I_D=2A		1		S
E_{OSS}	C_{OSS} Stored Energy	V_{DS}=1000V,f=1MHz		3		μJ
E_{ON}	Turn-On Energy（Body Diode）	V_{DS}=1200V,V_{GS}=-3/12V， I_D=2A， L=1mH T_J=175℃ Rext=25Ω		64		μJ
E_{OFF}	Turn-Off Energy（Body Diode）			15		μJ
Q_g	Total Gate Charge	V_{DS}=1200V, V_{GS}=-3V/12V, I_D = 2A		8		nC
Q_{gs}	Gate-source Charge			1.5		nC
Q_{gd}	Gate-Drain Charge			3		nC
$t_{d(on)}$	Turn-on Delay Time	V_{DS}=1200V,V_{GS}=-3V/12V, I_D =2A, L=1mH Rext=25Ω		10		ns
t_r	Rise Time			7		ns
$t_{d(off)}$	Turn-off Delay Time			8		ns
t_f	Fall Time			6		ns

Typical Performance-Reverse Diode(T_J = 25℃ unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_{FSD}	Forward Voltage	V_{GS}=0V,I_F=1A,T_J=25°C		3.5	6	V
		V_{GS}=0V,I_F=1A,T_J=175°C		3	6	V
Is	Continuous Diode Forward Current	V_{GS}=0V， T_C=25°C		5		A

Thermal Characteristics

Symbol	Parameter	Value.	Unit
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	2.5	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	40	°C/W

The values are based on the junction-to case thermal impedance which is measured with the device mounted to a large heat sink assuming maximum junction temperature of Tj(max)=175℃

Electrical Characteristics

Fig1. Output characteristics (T_J = 25 °C)

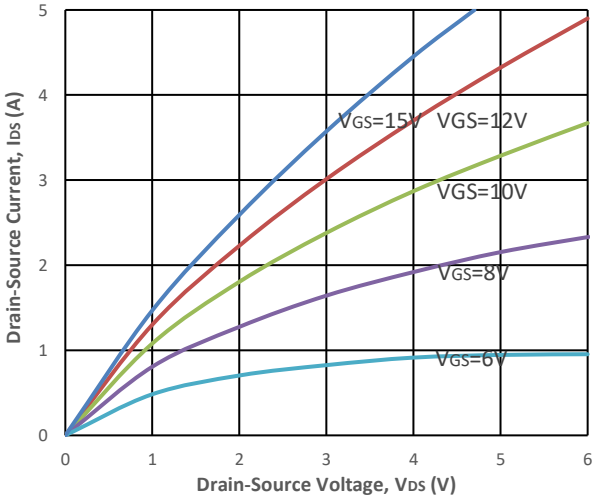

Fig2. Output characteristics (T_J = 175 °C)

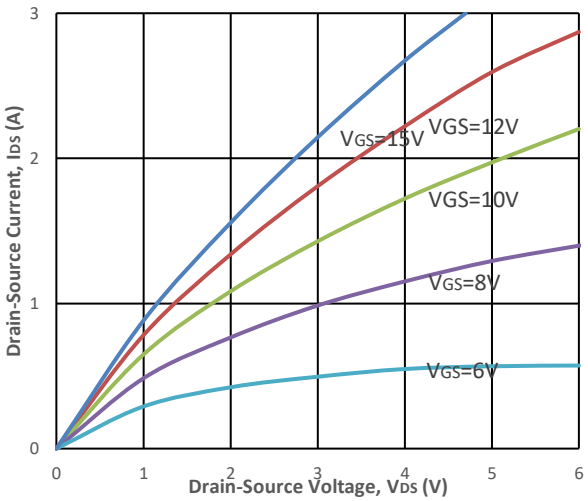

Fig3.Normalized On-Resistance vs. Temperature

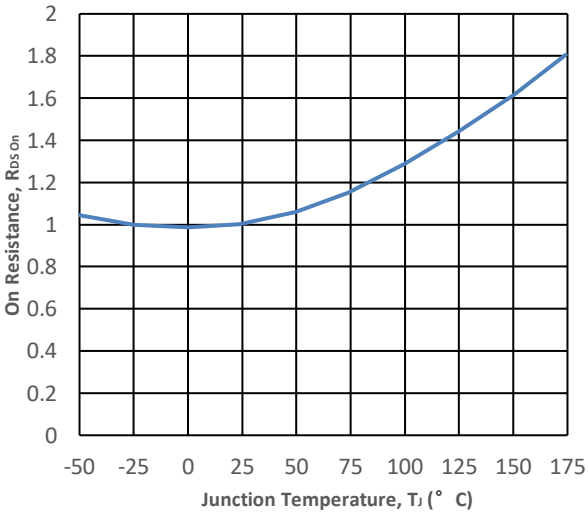

Fig4. On-Resistance vs. Temperature

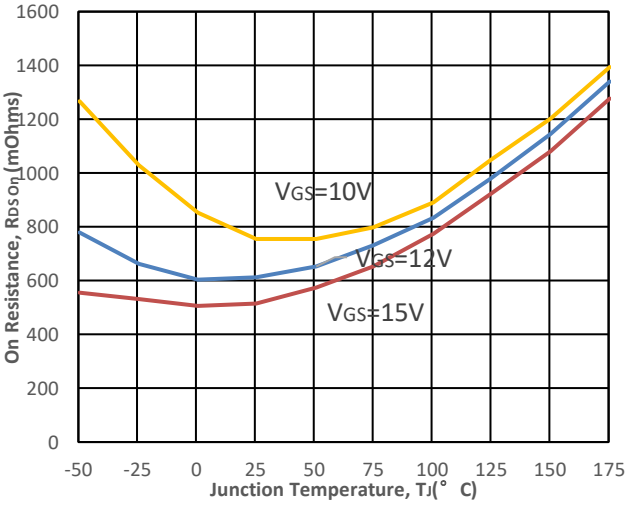

Fig5. Transfer Characteristic

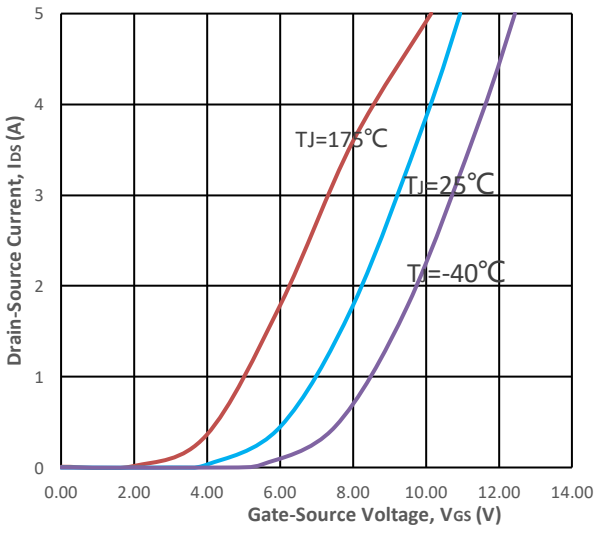

Fig6. Body Diode Characteristic at 25 °C

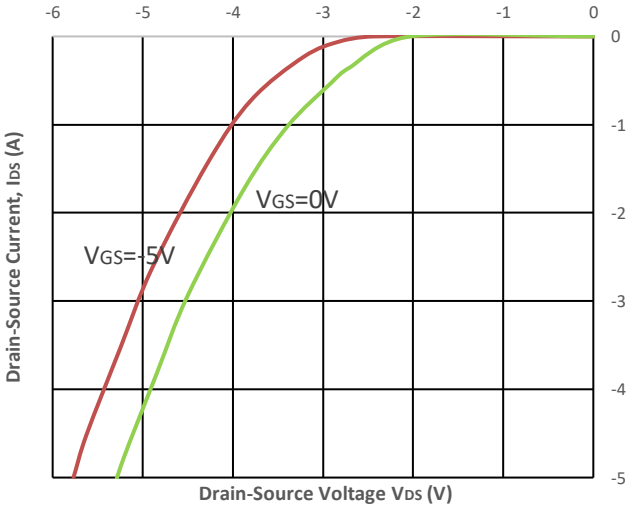

Fig7.Threshold Voltage vs. Temperature

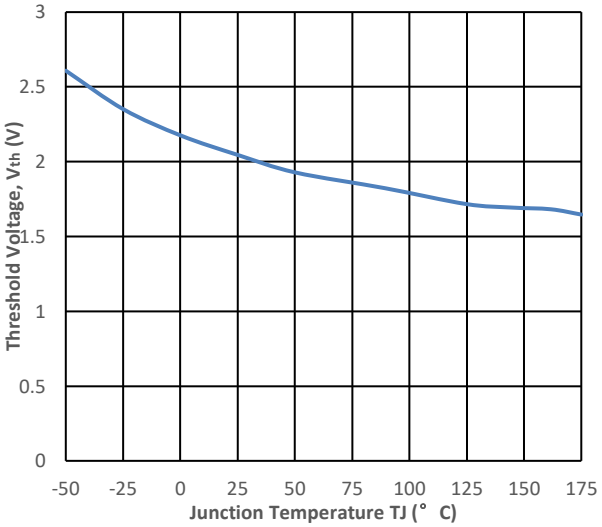

Fig8. Gate Charge Characteristics

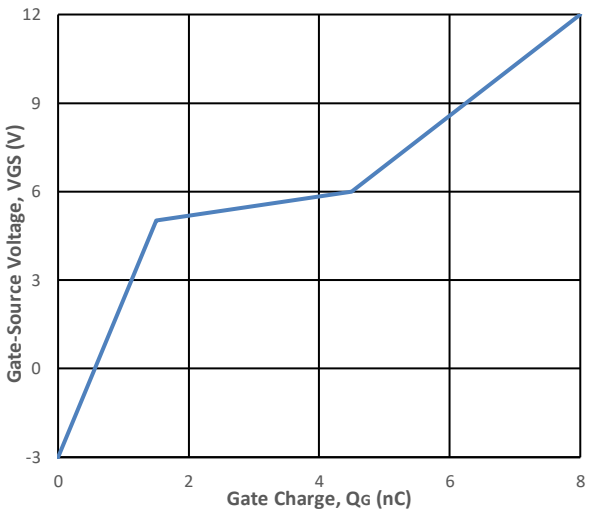

Fig9. 3rd Quadrant Characteristic at 25 °C

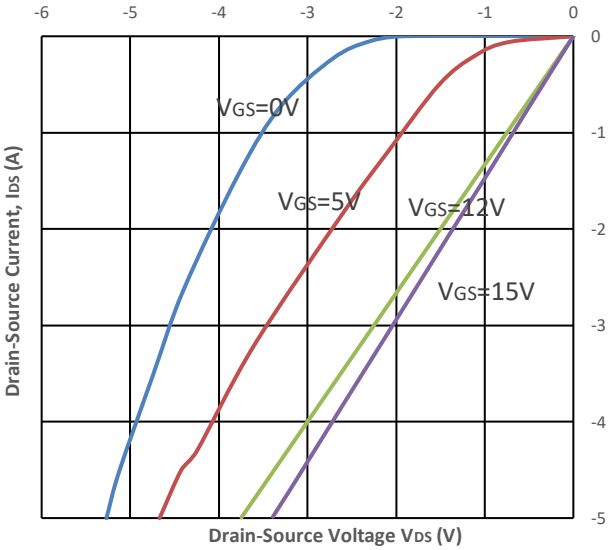

Fig10. Output Capacitor Stored Energy

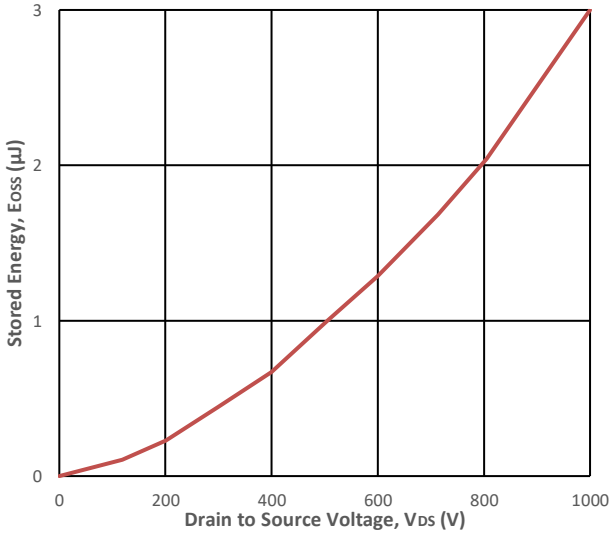

Fig11. Capacitances vs. Drain-Source

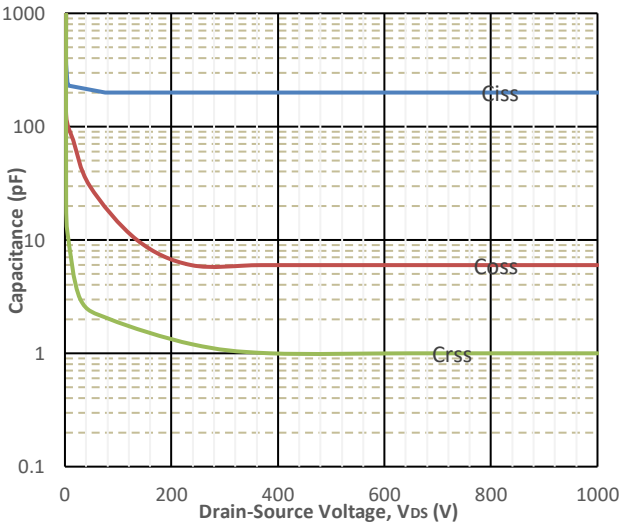

Fig12. Max Power Dissipation Derating Vs TC

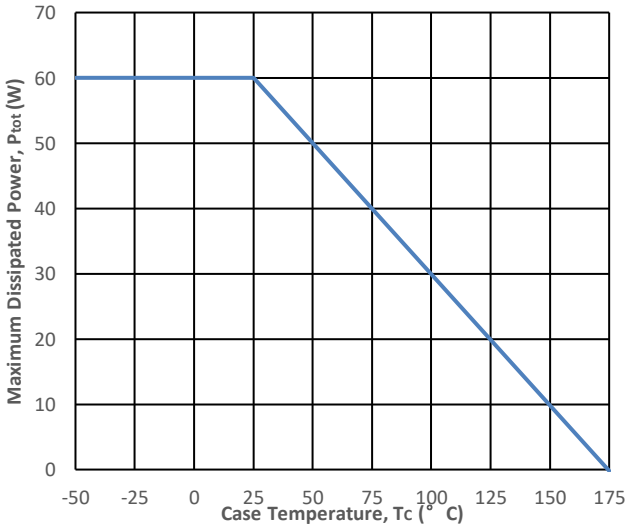

Fig13. Switching Energy vs. Drain Current

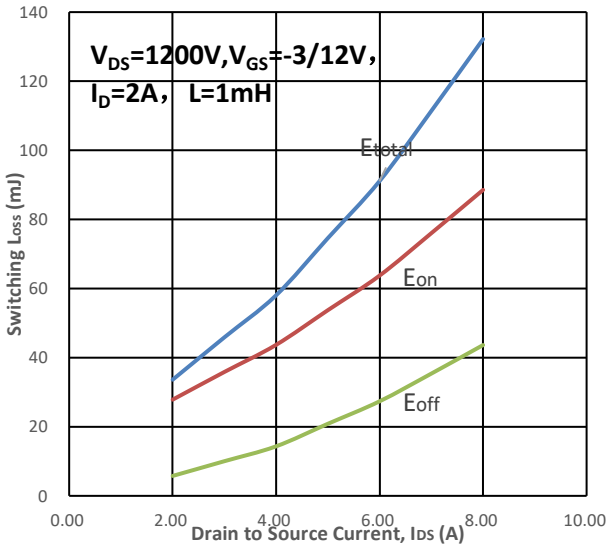

Fig14. Switching Energy vs. RG(ext)

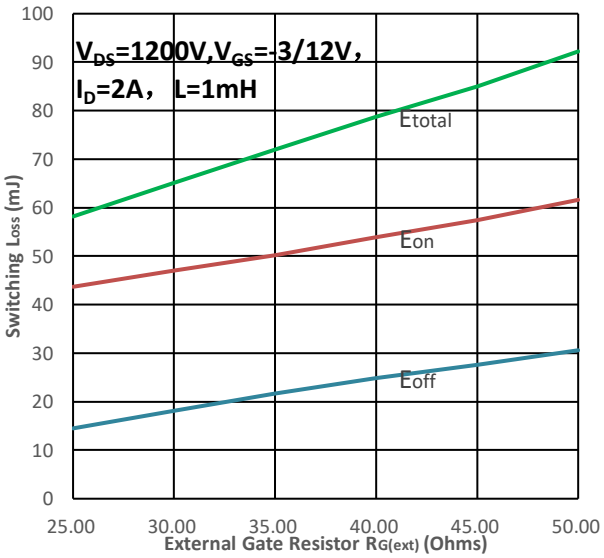

Fig15. Switching Energy vs. Temperature

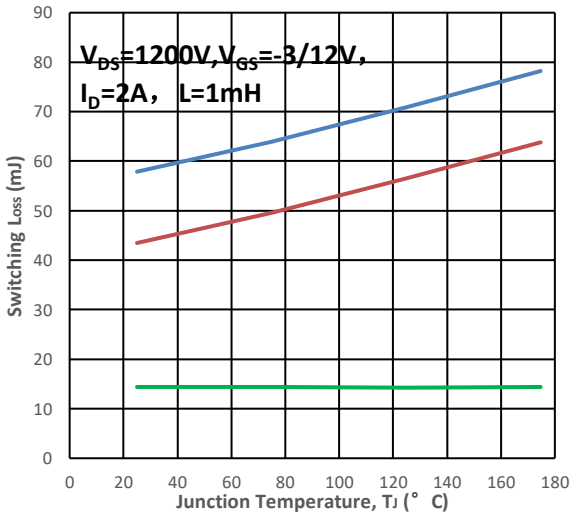

Fig16. Switching Times vs. RG(ext)

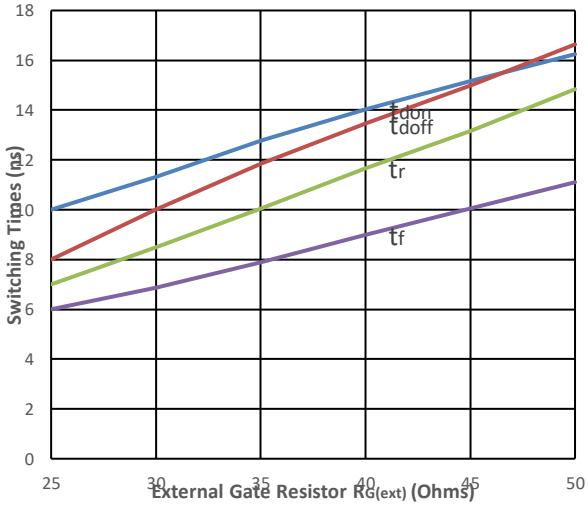

Fig17.Transient Thermal Impedance

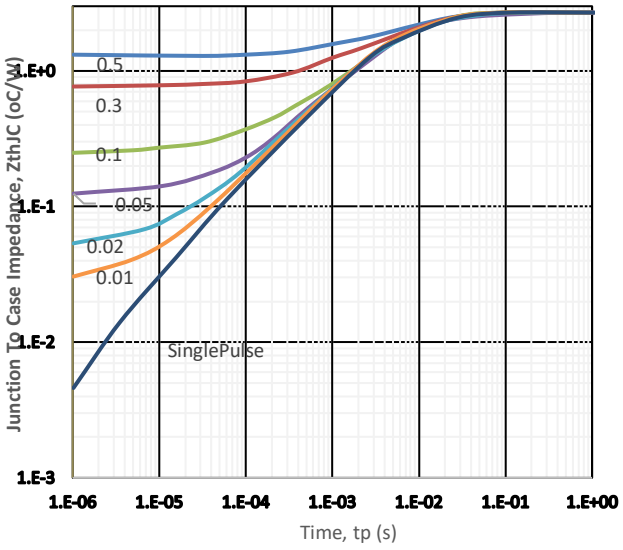

Fig18. Safe Operating Area

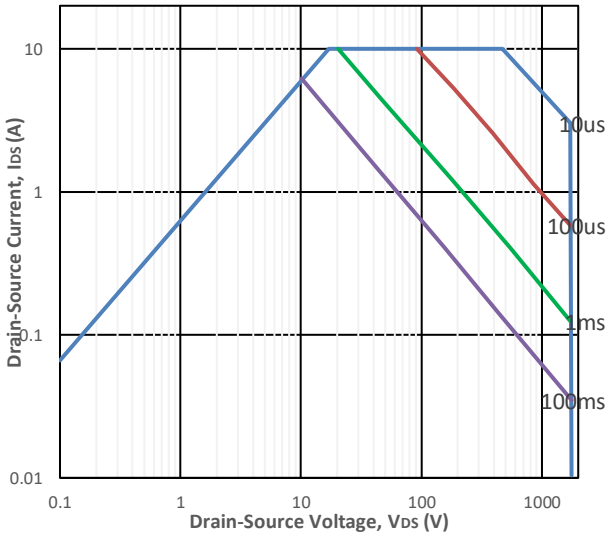

Package Drawing:

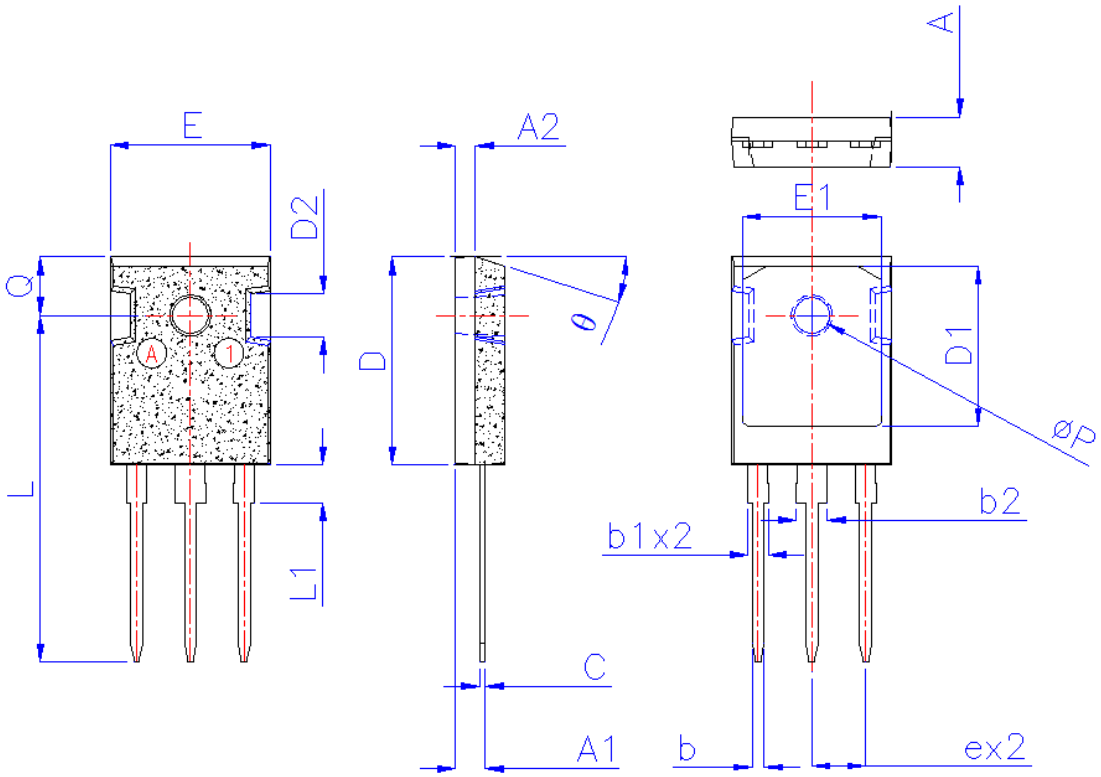

Dimensions（ UNIT：mm）

SYMBOLS	DIMENSIONS IN MILLIMETERS			DIMENSIONS IN INCHES		
	MIN	TYPE	MAX	MIN	TYPE	MAX
A	4.80	5.00	5.20	0.189	0.197	0.205
A1	2.85	3.00	3.15	0.112	0.118	0.124
b	1.16	1.22	1.27	0.046	0.048	0.050
b1	2.03	2.06	2.10	0.080	0.081	0.083
b2	3.03	3.06	3.10	0.119	0.120	0.122
C	0.55	0.60	0.65	0.022	0.024	0.026
D	20.80	21.00	21.20	0.819	0.827	0.835
D1	15.94	16.24	16.54	0.628	0.639	0.651
D2	4.30 BSC			0.169 BSC		
e	5.44 BSC			0.214 BSC		
E	15.95	16.15	16.35	0.628	0.636	0.644
E1	13.82	14.02	14.26	0.544	0.552	0.561
L	34.65	35.05	35.45	1.364	1.380	1.396
L1	-	-	3.86	-	-	0.152
Q	5.85	5.95	6.05	0.230	0.234	0.238
⌀P	3.45	3.60	3.75	0.136	0.142	0.148
θ	17.5°			0.689°		